

Manufacturer of Concrete Batching, Mining, & Quarrying, Blending & Asphalt Equipment




Gunlake Silverwater Plant



Allied NZ Plant

All CMQ conveyors have:

- » sealed bearings requiring minimum maintenance.
- » a unique designed inclined troughing roller and return roller system which fits standard troughing frames.
- » 30mm gap between roller and frame, eliminating rock jamming.

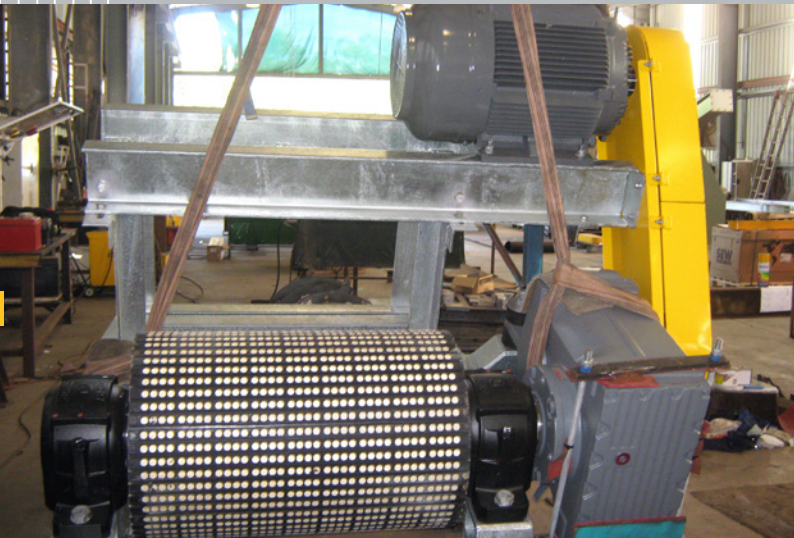

Ceramic impregnated head drum: eliminates belt slippage and greatly increases the life of the rubber lagging on the head drum



CMQ special screw take up where take up thread is not exposed to the elements. Used on conveyors less than 30M long.